



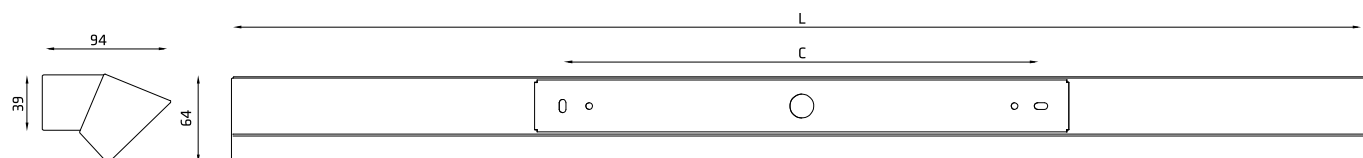

Vindo S 14, Vindo S 24, Vindo S 21, Vindo S 39, Vindo S 28, Vindo S 54, Vindo S 9, Vindo S 13, Vindo S 17

LT | Šviestuvai, skirtas montavimui virš veidrodžio. Komplektuojamas su liuminescencine T5 lempa arba LED šviesos šaltiniais. Šviesos išsklaidymui naudojamas matinis organinis sklaidytuvas. Šviestuvo plieninis korpusas padengtas milteliniais dažais, standartinės spalvos: balta arba pilka. LED versijos šviesos spalvos temperatūra 3000 K, kitos spalvinės temperatūros pagal atskirą paklausimą. Aukštas spalvų atkūrimas CRI >80, leistinas nuokrypis MacAdam 3. Tarnavimo trukmė 60 000 val. (L80/B10). Pagal specialų užsakymą galimi reguliuojamo šviesos srauto variantai (DALI, push DIM). Apsaugos laipsnis IP20.

EN | Wall mounted luminaire for vertical lighting. Can be equipped with built-in LED's or fluorescent T5 lamps. Steel housing with white or grey powder coating. Opal PMMA diffuser. LED version provides light colour temperature 3000 K, other colour temperatures available on request. Colour rendering CRI >80, colour tolerance MacAdam 3. DALI dimmable version available. Lifetime 60 000 h (L80/B10). Protection degree IP20.

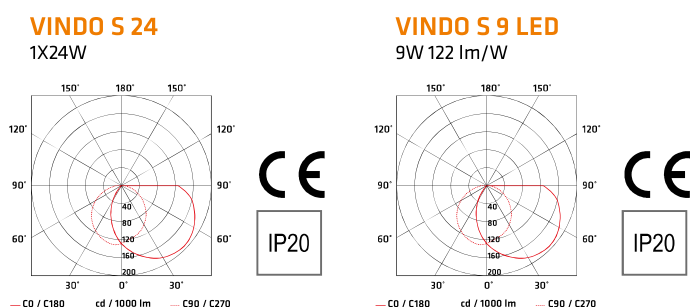

T5

Modelis/ model	W	L mm	C, mm	Spalva/ color	Kodas/ code
Vindo S 14	1x14 W	578	360	Balta/white Pilka/metallic	V014W1140DOP00WV0 V014W1140DOPALMV0
Vindo S 24	1x24 W	578	360	Balta/white Pilka/metallic	V024W1240DOP00WV0 V024W1240DOPALMV0
Vindo S 21	1x21 W	878	360	Balta/white Pilka/metallic	V021W1210DOP00WV0 V021W1210DOPALMV0
Vindo S 39	1x39 W	878	360	Balta/white Pilka/metallic	V039W1390DOP00WV0 V039W1390DOPALMV0
Vindo S 28	1x28W	1178	360	Balta/white Pilka/metallic	V028W1280DOP00WV0 V028W1280DOPALMV0
Vindo S 54	1x54 W	1178	360	Balta/white Pilka/metallic	V054W1540DOP00WV0 V054W1540DOPALMV0

LED

Modelis/ model	W	lm	L mm	C, mm	Spalva/ color	Kodas/ code
Vindo S 9 LED	9 W	1 095	577	360	Balta/ white	V009W1090DOP00WL0
Vindo S 13 LED	13 W	1 645	877	360	Balta/ white	V013W1130DOP00WL0
Vindo S 17 LED	17 W	2 190	1177	360	Balta/ white	V017W1170DOP00WL0