




PAVIRŠINIAI ŠVIESTUVAI | SURFACE MOUNTED LUMINAIRES:

Vindo V 57, Vindo V 90, Vindo V 120, Vindo V 150, Vindo V 240, Vindo V 300

LT Paviršiniai šviestuvai skirti liuminescencinėms T5 lempoms arba komplektuojami su LED šviesos šaltiniais. Gali būti kabunami prie lubų naudojant pakabinimo komplektą. Šviesos išsklaidymui naudojamas matinis organinis sklaidytuvas. Šviestuvas plieninis korpusas padengtas baltais (RAL 9003) milteliniais dažais. LED versijos šviesos spalvos temperatūra 3000 K, kitos spalvinės temperatūros pagal atskirą paklausimą. Aukštas spalvų atkūrimas CRI > 80, leistinas nuokrypis MacAdam 3. Tarnavimo trukmė 60 000 val. (L80/B10). Galimas DALI šviesos srauto reguliavimas 1...100%. Apsaugos laipsnis IP20.

EN Linear luminaire for surface mounting or suspension. Can be equipped with built-in LED's or fluorescent T5 lamps. Steel housing with white (RAL 9003) powder coating. Opal PMMA diffuser. LED version provides light colour temperature 3000K, other colour temperatures available on request. Colour rendering CRI > 80, colour tolerance MacAdam 3. DALI dimmable version available. Lifetime 60 000h (L80/B10). Protection degree IP20.

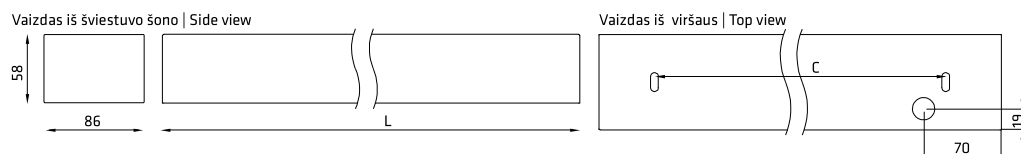

Opalinis stiklas / opal glass



Šviestuvai su opaliniu sklaidytuvu | Luminaires with opal diffuser


T5

Modelis/ model	W	Spalva/ colour	L, mm	C, mm	Kodas/ code
Vindo V 57	1x14 W 1x24 W 1x24 W	Balta/white Balta/white Metalik/metallic	589	489	V057S1140DOP00WV0 V057S1240DOP00WV0 V057S1240DOPALMV0
Vindo V 90	1x21 W 1x21 W 1x39 W 1x39 W	Balta/white Metalik/metallic Balta/white Metalik/metallic	877	777	V090S1210DOP00WV0 V090S1210DOPALMV0 V090S1390DOP00WV0 V090S1390DOPALMV0
Vindo V 120	1x54 W 1x54 W 1x28 W 1x28 W	Balta/white Metalik/metallic Balta/white Metalik/metallic	1177	1077	V120S1540DOP00WV0 V120S1540DOPALMV0 V120S1280DOP00WV0 V120S1280DOPALMV0
Vindo V 150	1x35 W 1x35 W 1x49 W 1x49 W 1x80 W 1x80 W	Balta/white Metalik/metallic Balta/white Metalik/metallic Balta/white Metalik/metallic	1477	1377	V150S1350DOP00WV0 V150S1350DOPALMV0 V150S1490DOP00WV0 V150S1490DOPALMV0 V150S1800DOP00WV0 V150S1800DOPALMV0
Vindo V 240	2x28 W 2x28 W 2x54 W 2x54 W	Balta/white Metalik/metallic Balta/white Metalik/metallic	2232	2132	V240S2280DOP00WV0 V240S2280DOPALMV0 V240S2540DOP00WV0 V240S2540DOPALMV0
Vindo V 300	2x35 W 2x35 W 2x49 W 2x49 W 2x80 W 2x80 W	Balta/white Metalik/metallic Balta/white Metalik/metallic Balta/white Metalik/metallic	2832	2732	V300S2350DOP00WV0 V300S2350DOPALMV0 V300S2490DOP00WV0 V300S2490DOPALMV0 V300S2800DOP00WV0 V300S2800DOPALMV0


LED

Model- is/ model	W	lm	Spalva/ colour	L, m	C, mm	Kodas/ code
Vindo V 57 LED	12 W	1 270	Balta/ white	589	489	V057S1120DOP00WL0
Vindo V 90 LED	17 W	1 910	Balta/ white	877	777	V090S1190DOP00WL0
Vindo V 120 LED	22 W	2 545	Balta/ white	1 177	1 077	V120S1250DOP00WL0
Vindo V 150 LED	27 W	3 180	Balta/ white	1 477	1 377	V150S1310DOP00WL0
Vindo V 240 LED	39 W	4 770	Balta/ white	2 232	2 132	V240S2250DOP00WL0
Vindo V 300 LED	54 W	6 355	Balta/ white	2 832	2 732	V300S2310DOP00WL0

VINDO V 57 OP
1x24W



VINDO V 120 LED OP
22W 116 lm / W






Šviestuvai su mikroprizmatiniu sklaidytuvu | Luminaires with micro prism diffuser

T5 

Modelis/ model	W	Spalva/ colour	L, mm	C, mm	Kodas/ code
Vindo V 57	1x24 W 1x24 W	Balta/white Metalik/metallic	589	489	V057S1240DMP00WV0 V057S1240DMPALMV0
Vindo V 90	1x21 W 1x21 W 1x39 W 1x39 W	Balta/white Metalik/metallic Balta/white Metalik/metallic	877	777	V090S1210DMP00WV0 V090S1210DMPALMV0 V090S1390DMP00WV0 V090S1390DMPALMV0
Vindo V 120	1x28 W 1x28 W 1x54 W 1x54 W	Balta/white Metalik/metallic Balta/white Metalik/metallic	1 177	1 077	V120S1280DMP00WV0 V120S1280DMPALMV0 V120S1540DMP00WV0 V120S1540DMPALMV0
Vindo V 150	1x35 W 1x35 W 1x49 W 1x49 W 1x80 W 1x80 W	Balta/white Metalik/metallic Balta/white Metalik/metallic Balta/white Metalik/metallic	1 477	1 377	V150S1350DMP00WV0 V150S1350DMPALMV0 V150S1490DMP00WV0 V150S1490DMPALMV0 V150S1800DMP00WV0 V150S1800DMPALMV0
Vindo V 240	2x28 W 2x28 W 2x54 W 2x54 W	Balta/white Metalik/metallic Balta/white Metalik/metallic	2 232	2 132	V240S2280DMP00WV0 V240S2280DMPALMV0 V240S2540DMP00WV0 V240S2540DMPALMV0
Vindo V 300	2x35 W 2x35 W 2x49 W 2x49 W 2x80 W 2x80 W	Balta/white Metalik/metallic Balta/white Metalik/metallic Balta/white Metalik/metallic	2 832	2 732	V300S2350DMP00WV0 V300S2350DMPALMV0 V300S2490DMP00WV0 V300S2490DMPALMV0 V300S2800DMP00WV0 V300S2800DMPALMV0

Vaizdas iš šviestuvo šono | Side view

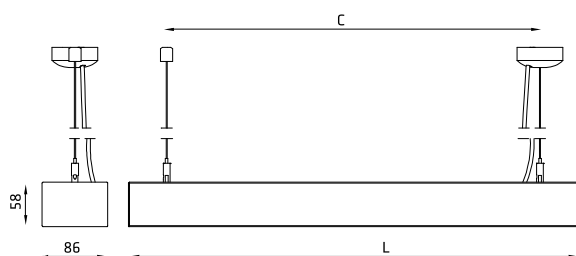

Prismatic glass



Priedai Accessories	Kodas/code
Pakabinimo komplektas 1,3 m laidas (skaidrus) 3 gyslų Suspension kit 1,3 m cable (clear) with 3 cores	0113S000000000W00
Pakabinimo komplektas 2,5 m laidas (skaidrus) 3 gyslų Suspension kit 2,5 m cable (clear) with 3 cores	0250S000000000W00
Pakabinimo komplektas 3,5 m laidas (skaidrus) 3 gyslų Suspension kit 3,5 m cable (clear) with 3 cores	0350S000000000W00
Pakabinimo komplektas 1,3 m laidas (skaidrus) 5 gyslų Suspension kit 1,3 m cable (clear) with 5 cores	0113S000000000W01
Pakabinimo komplektas 2,5 m laidas (skaidrus) 5 gyslų Suspension kit 2,5 m cable (clear) with 5 cores	0250S000000000W01
Pakabinimo komplektas 3,5 m laidas (skaidrus) 5 gyslų Suspension kit 3,5 m cable (clear) with 5 cores	0350S000000000W01

